

NEW

New Autoclave


New Autoclave

Basic configuration : 2 hoses, autoclave gloves, tong gloves, 2 baskets
 Additional options : Additional basket available for purchase, dedicated distilled water, printer

- Automatic discharge of high temperature pressure 3 times, removal of air pockets
- X-ray inspection of all chamber welds
- Heater overheating prevention sensor and automatic water level control sensor
- Door sensor (Gating)
- Automatic replenishment of distilled water
- Printer interface

	BF-45B	BF-60B	BF-90B	BF-110B
Volume	45L	60L	90L	116L
heater	3kw	3kw	4.5kw	4.5kw
sensor	PT-100(Sterilization only)			
temperature error	±0.5℃			
Voltage	220V			
Temperature set	115-134℃			
texture	SUS304			
GW/NW	75/58kg	106/80kg	120/90kg	133/106kg
chamber size	Φ 350X520	Φ 350X630	Φ 400X720	Φ 450X730
basket size	Φ 320X350 (1개)	Φ 320X240 (2개)	Φ 360X280 (2개)	Φ 410X300 (2개)
external size	(W)480 X (D)480 X (H)1,000mm	(W)480 X (D)480 X (H)1,120mm	(W)525 X (D)525 X (H)1,190mm	(W)555 X (D)555 X (H)1,250mm
packaging size	(W)580 X (D)630 X (H)1,130mm	(W)580 X (D)630 X (H)1,230mm	(W)630 X (D)680 X (H)1,290mm	(W)690 X (D)650 X (H)1,410mm

Automatic discharge of high temperature pressure
 3 times, removal of air pockets

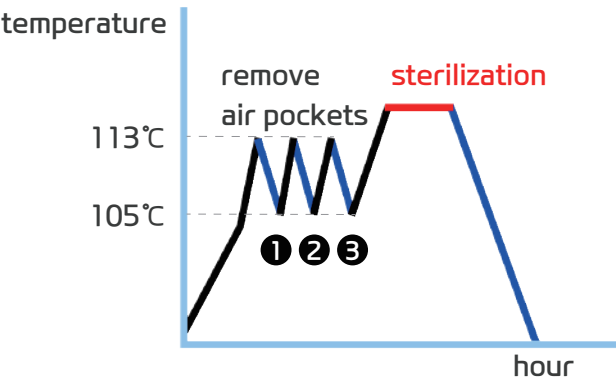

LCD Panel



BF-60B



hose



autoclave gloves



tong gloves



basket



printer



dedicated distilled water